




V 2.2





- Less weightness and ergonomic design make the scope procedure more easier to control.
- Easy to control all scope procedure.

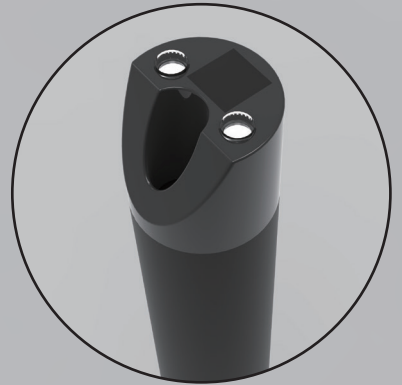

- 2 light guide lens make the viewing more bright.
- Taper-shape distal tip makes insertion more easier.



■ Bending angle 275°

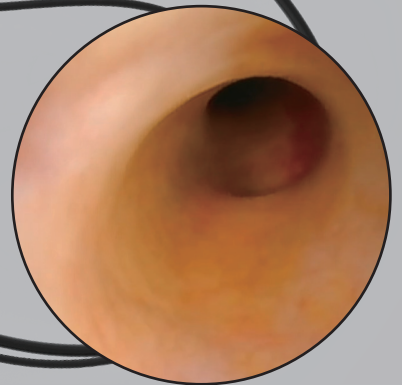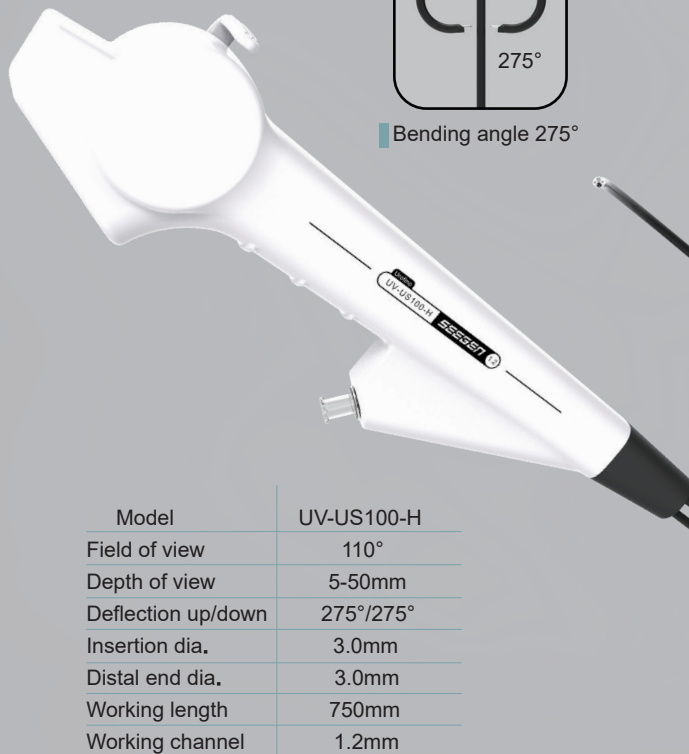

■ High resolution Image.

Model	UV-US100-H
Field of view	110°
Depth of view	5-50mm
Deflection up/down	275°/275°
Insertion dia.	3.0mm
Distal end dia.	3.0mm
Working length	750mm
Working channel	1.2mm

Image Process Specification

Power	Voltage	100-240 VAC
	Frequency	50/60 Hz
	Rated input	45 VA
illumination	Lamp	2W LED
	Color temperature	3,000K-7,000K
Function	White balance, Luminance control(+/-), Enhance(0,1,2), Zoom(x1,x2,x3), Freeze, Snap, Record, USB storage)	
Output	DVI*1, S-Video*1, CVBS*1	
Storage	USB (FAT 32)	
Dimensions	350mm(W) * 130mm(H) * 425mm(D)	
Weight	8 kg	



Shanghai SeeGen Photoelectric Technology Co.,Ltd.

Add.: 3 Floor, Building No.1 4299 Jindu Road, Minhang Dist., Shanghai China

Email: info@seegen.com.cn